


A Path for Pedestrians and Bicycles Connects
 the Elementary School to the High School

Walking and biking connector
BROWN DEER CAMPUS

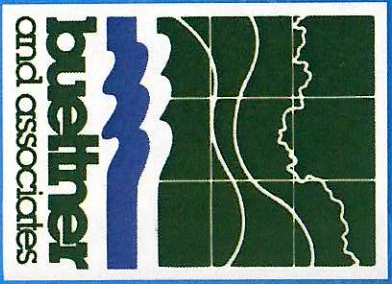

Campus Trail Costs - Priority 2

Item	Unit	Quantity	Unit Price	Total
Engineering Design	Lump Sum	1	\$15,000	\$15,000.00
Survey	Lump Sum	1	\$5,000	\$5,000.00
6" crushed aggregate base course, including subgrade prep and grading	SY	6,050 SY (5,445 LF X 10-ft wide)	\$7.67	\$46,403.50
3" Asphalt Trail	SY	6,050 SY (5,445 LF X 10-ft wide)	\$26.33	\$159,296.50
Restoration	Lump Sum	1	\$20,000	\$20,000.00
SUB-TOTAL				\$245,700.00
CONTINGENCY				10%
TOTAL				\$270,270.00